

TOYO TIRES®

OPEN COUNTRY® A/T VERSATILE ALL-TERRAIN LIGHT TRUCK RADIAL

The durable Open Country A/T offers aggressive wet and snow traction for pickups, vans and SUVs. This versatile all-terrain radial delivers rugged good looks without compromising handling, ride comfort or on- and off-road stability.

Typical Vehicle Matches

Virtually any pickup, van, or SUV in highway and all-terrain use

Typical Customer Matches

Rural customers requiring more All-Terrain traction than Original Equipment

Competitive Products

- BFGoodrich All-Terrain T/A ^{K0}
- Bridgestone Dueler A/T REVO
- Cooper Discoverer ATR
- Firestone Destination A/T
- Goodyear Wrangler SilentArmor
- Michelin LTX A/T ²
- Pirelli Scorpion ATR

WARRANTY

P-Metric sizes: 50,000-mile treadwear limited warranty.

LT & Non P-Metric sizes, Up to 17": 40,000

18" and higher wheel diameter: workmanship and materials only.




UTQG P-Metric Sizes

500 A B

Customer Benefit	Product Features
Smooth Ride	<ul style="list-style-type: none"> • DSOC II™ Technology • High turn-up polyester construction • Spiral-wound cap ply (construction may vary by size) • Special wavy sipe arrangement • Single-strand bead wire package
All-Terrain Traction	<ul style="list-style-type: none"> • Aggressive tread design • Cap/base construction • Computer-optimized tread design resists aquaplaning and increases snow traction • Open shoulder design
Improved Snow Traction	<ul style="list-style-type: none"> • Groove-bottom siping • M&S rated • Computer-optimized tread design resists aquaplaning and increases snow traction
Handling	<ul style="list-style-type: none"> • High bead filler • Two wide steel belts • Open shoulder design • High turn-up polyester casing
Durability and Long Life	<ul style="list-style-type: none"> • Cap/base construction • 500 UTQG Treadwear rating (P-metric) • Aggressive block design resists uneven wear • Wide steel belt configuration • High turn-up polyester casing
Appearance/Style	<ul style="list-style-type: none"> • Rim protector • Aggressive tread design • Open shoulder design • Clean outline white or serrated black sidewall lettering

LIGHT TRUCK/SUV

OPEN COUNTRY® A/T – VERSATILE ALL-TERRAIN LIGHT TRUCK RADIAL

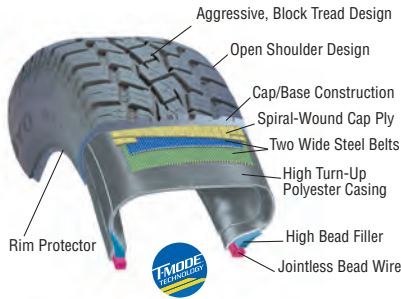

Tire Size	Product Code	Approved Rim Width Range (inch)	Tire Weight (lbs.)	Tread Depth (3/32")	Inflated Dimensions		Static Loaded Radius (inch)	Max. Load (lbs.)		Max. Pressure (PSI)		Revs Per Mile	Construction		Price
					O.A.D. (inch)	O.A.W. (inch)		Single	Dual	Single	Dual		Tread	Sidewall	
P-Metric/Metric															
P225/70R14 98S*	300190	6.0-6.5-7.5	24	13	26.6	8.9	11.9	1675	-	35	-	781			
P205/75R15 97S*	300080	5.0-5.5-7.0	23	12	27.1	8.0	12.3	1598	-	35	-	764			
P215/75R15 100S*	300070	5.5-6.0-7.0	25	12	27.7	8.5	12.4	1742	-	35	-	751			
P225/75R15 102S*	300060	6.0-7.5	27	13	28.3	8.8	12.7	1874	-	35	-	732			
P235/75R15 105S*	300050	6.0-6.5-8.0	29	13	28.9	9.3	12.9	2028	-	35	-	719			
P235/75R15 108S XL*	300220	6.0-6.5-8.0	31	13	28.9	9.3	12.9	2183	-	41	-	719			
P265/75R15 112S*	300040	7.0-7.5-9.0	36	13	30.7	10.5	13.6	2469	-	35	-	677			
P225/70R15 100T*	300310	6.0-6.5-7.5	26	13	27.4	9.0	12.4	1753	-	35	-	754			
P235/70R15 102S*	300170	6.0-7.0-8.0	27	13	28.0	9.5	12.6	1896	-	35	-	743			
P265/70R15 110S	300160	7.0-8.0-9.0	35	13	29.7	10.7	13.2	2337	-	35	-	701			
P225/75R16 104S	300030	6.0-7.5	27	13	29.3	8.8	13.2	1984	-	35	-	706			
P235/75R16 106T*	300250	6.0-6.5-8.0	32	13	29.9	9.3	13.4	2094	-	35	-	695			
P245/75R16 109S*	300020	6.5-7.0-8.0	35	13	30.5	9.8	13.7	2271	-	35	-	681			
P265/75R16 114S*	300010	7.0-7.5-9.0	39	13	31.7	10.5	14.1	2601	-	35	-	656			
P215/70R16 99S	300150	5.5-6.5-7.0	24	12	27.9	8.7	12.7	1709	-	35	-	742			
P225/70R16 101S*	300140	6.0-6.5-7.5	28	13	28.4	9.0	12.9	1819	-	35	-	727			
P235/70R16 104T*	300320	6.0-7.0-8.0	30	13	29.0	9.5	13.1	1984	-	35	-	717			
P245/70R16 106S*	300120	6.5-7.0-8.0	33	13	29.5	9.8	13.2	2094	-	35	-	708			
P255/70R16 109S*	300110	6.5-7.5-8.5	35	13	30.1	10.2	13.5	2271	-	35	-	691			
P265/70R16 111T*	300330	7.0-8.0-9.0	39	13	30.6	10.7	13.8	2403	-	35	-	676			
P275/70R16 114H	300090	7.0-8.0-9.0	41	13	31.2	11.0	13.9	2601	-	35	-	667			
255/65R16 109H	300200	7.0-7.5-9.0	33	13	29.1	10.2	13.2	2271	-	44	-	708			
P235/75R17 108S*	300560	6.0-6.5-8.0	34	13	30.9	9.3	13.9	2205	-	35	-	673	2S+2P+1N	2P	
P245/75R17 110S*	300570	6.5-7.0-8.0	37	13	31.5	9.8	14.1	2373	-	35	-	660	2S+2P+1N	2P	
P255/75R17 113S	300470	6.5-7.0-8.5	39	13	32.1	10.0	14.4	2535	-	35	-	647	2P+2S+1N	2P	
P235/70R17 108S XL*	300550	6.0-7.0-8.0	32	13	29.9	9.6	13.5	2205	-	41	-	694	2S+2P+1N	2P	
P245/70R17 108S	300230	6.5-7.0-8.0	38	13	30.6	9.8	13.8	2205	-	35	-	680	2P+2S+1N	2P	
P255/70R17 110S*	300660	6.5-7.5-8.5	39	13	31.1	10.2	14.0	2337	-	35	-	668	2S+2P+1N	2P	
P265/70R17 113S*	300210	7.0-8.0-9.0	39	13	31.7	10.7	14.2	2535	-	35	-	658			
P285/70R17 117T*	300580	7.0-8.5-9.5	44	13	32.7	11.4	14.6	2833	-	35	-	636	2S+2P+2N	2P	
P235/65R17 103H*	300260	6.5-7.0-8.5	31	12	29.0	9.4	13.2	1929	-	35	-	717			
P245/65R17 105T*	300270	7.0-8.5	31	13	29.5	9.6	13.4	2039	-	35	-	704	2P+2S+1N	2P	
P255/65R17 108S*	300380	7.0-7.5-9.0	36	13	30.1	10.0	13.6	2205	-	35	-	690	2P+2S+1N	2P	
P265/65R17 110S*	301490	7.5-8.0-9.5	38	13	30.5	10.6	13.8	2337	-	35	-	681	2P+2S+1N	2P	
275/65R17 115T	301530	7.5-8.0-9.5	41	13	31.0	11.0	14.0	2679	-	44	-	670	2P+2S+1N	2P	
235/60R17 102H	300370	6.5-7.0-8.5	31	13	28.1	9.4	12.8	1874	-	44	-	739	2S+2P+1N	2P	
P275/60R17 110T*	300280	7.5-8.0-9.5	35	13	29.9	11.1	13.5	2337	-	35	-	694			
P265/70R18 114S*	301520	7.0-8.0-9.0	44	13	32.6	10.7	14.7	2601	-	35	-	636	2P+2S+1N	2P	
P265/65R18 112S	300860	7.5-8.0-9.5	41	12	31.6	10.6	14.3	2469	-	35	-	657	2P+2S+1N	2P	
P275/65R18 114T	300640	7.0-8.0-9.5	42	13	32.1	11.0	14.5	2601	-	35	-	647	2S+2P+1N	2P	
P265/60R18 109S	300460	7.5-8.0-9.5	38	13	30.6	10.7	13.9	2271	-	35	-	679	2P+2S+1N	2P	
285/60R18 120S RD	301300	8.0-8.5-10.0	49	14	31.3	11.5	14.2	3086	-	50	-	664			
255/55R18 109H RD	301510	7.0-8.0-9.0	34	12	29.0	10.3	13.3	2271	-	50	-	716	2P+2S+1N	2P	
P275/60R20 114T*	300290	7.5-8.0-9.5	42	13	32.9	11.0	15.0	2601	-	35	-	632			
P275/55R20 111S	300840	7.5-8.5-9.5	43	12	31.9	11.2	14.6	2403	-	35	-	652	2P+2S+2N	1P	
285/50R20 116T RD	300590	8.0-9.0-10.0	44	12	31.3	11.5	14.4	2756	-	50	-	664	2S+2P+2N	2P	
305/50R20 120T RD*	300300	8.5-9.5-11.0	46	14	31.9	12.2	14.6	3086	-	50	-	651			
305/40R22 114S RD	301460	10.0-11.0-12.0	45	14	31.6	12.2	14.7	2601	-	50	-	658	2P+2S+2N	2P	

* Indicates white letter styling. RD = Reinforced. XL = Extra Load. Bold designates measuring rim width. All Toyo brand tires are subject to continuous development. Toyo Tire U.S.A. Corp. reserves the right to change construction, materials or specifications without notice or obligation. Contact your Toyo dealer or Toyo Tires for current information.

Construction Elements

Tread: 3P = 3-Ply Polyester Casing, 2P = 2-Ply Polyester Casing, 2S = 2 Steel Belts, 2N = 2 Nylon Cap Plies, 1N = 1 Nylon Cap Ply Sidewall: 3P = 3 Ply Polyester See Toyo Safety Advisory for Lifted Light Trucks, Page 48

LIGHT TRUCK/SUV



OPEN COUNTRY® A/T – VERSATILE ALL-TERRAIN LIGHT TRUCK RADIAL

Tire Size	Product Code	Approved Rim Width Range (inch)	Tire Weight (lbs.)	Tread Depth (1/32")	Inflated Dimensions		Static Loaded Radius (inch)	Max. Load (lbs.)		Max. Pressure (PSI)		Revs Per Mile	Construction		Price
					O.A.D. (inch)	O.A.W. (inch)		Single	Dual	Single	Dual		Tread	Sidewall	
Light Truck															
30X9.50R15LT 104S C/6*	300520	6.5-7.5-8.5	36	16	29.5	9.5	13.1	1985	-	50	-	707			
31X10.50R15LT 109S C/6*	300510	7.0-8.5-9.0	39	16	30.5	10.5	13.5	2270	-	50	-	684			
LT235/75R15 104/101S C/6*	301100	6.0-6.5-7.0	33	14	28.9	9.3	12.9	1985	1820	50	50	722			
LT215/85R16 110/107Q D/8	301020	5.5-6.0-7.0	38	15	30.4	8.5	13.6	2335	2150	65	65	682			
LT215/85R16 115/112Q E/10	301030	5.5-6.0-7.0	38	15	30.4	8.5	13.6	2680	2470	80	80	682			
LT235/85R16 120/116Q E/10	301010	6.0-6.5-7.0	43	15	31.7	9.3	14.2	3042	2778	80	80	653			
LT225/75R16 110/107Q D/8	301080	6.0-7.0	36	14	29.3	8.8	13.2	2335	2150	65	65	711			
LT225/75R16 115/112Q E/10	301090	6.0-7.0	36	14	29.3	8.8	13.2	2680	2470	80	80	711			
LT245/75R16 108/104S C/6*	301060	6.5-7.0-7.5	40	15	30.5	9.8	13.6	2205	2006	50	50	683			
LT245/75R16 120/116Q E/10*	301070	6.5-7.0-7.5	41	15	30.5	9.8	13.6	3042	2778	80	80	683			
LT265/75R16 112/109S C/6*	301040	7.0-7.5-8.0	43	16	31.7	10.5	14.1	2470	2270	50	50	658	2P+2S+1N	2P	
LT265/75R16 119/116Q D/8*	301050	7.0-7.5-8.0	46	16	31.7	10.5	14.1	3000	2755	65	65	658	2P+2S+2N	2P	
LT265/75R16 123/120Q E/10*	301110	7.0-7.5-8.0	49	16	31.7	10.5	14.1	3415	3085	80	80	659	2P+2S+2N	2P	
LT235/80R17 120/117S E/10*	301470	6.0-7.0-7.5	43	15	31.7	9.3	14.3	3085	2835	80	80	654	2P+2S+2N	2P	
LT245/75R17 121S E/10*	300670	6.5-7.0-7.5	46	15	31.5	9.9	14.1	3195	-	80	-	660	2P+2S+2N	2P	
LT265/70R17 118/115S D/8*	301270	7.0-8.0-8.5	44	16	31.7	10.7	14.2	2910	2680	65	65	658	2P+2S+1N	2P	
LT265/70R17 121/118S E/10*	301390	7.0-8.0-8.5	47	16	31.6	10.6	14.2	3195	2910	80	80	658	2P+2S+2N	2P	

* Indicates white letter styling. RD = Reinforced. Bold designates measuring rim width. All Toyo brand tires are subject to continuous development. Toyo Tire U.S.A. Corp. reserves the right to change construction, materials or specifications without notice or obligation. Contact your Toyo dealer or Toyo Tires for current information.

Construction Elements

Tread: 3P = 3-Ply Polyester Casing, 2P = 2-Ply Polyester Casing, 2S = 2 Steel Belts, 2N = 2 Nylon Cap Plies, 1N = 1 Nylon Cap Ply **Sidewall:** 3P = 3 Ply Polyester **See Toyo Safety Advisory for Lifted Light Trucks, Page 48**

LIGHT TRUCK/SUV

TOYO TIRES®



OPEN COUNTRY® A/T – VERSATILE ALL-TERRAIN LIGHT TRUCK RADIAL



LIGHT TRUCK/SUV

Tire Size	Product Code	Approved Rim Width Range (inch)	Tire Weight (lbs.)	Tread Depth (1/32")	Inflated Dimensions		Static Loaded Radius (inch)	Max. Load (lbs.)		Max. Pressure (PSI)		Revs Per Mile	Construction		Price
					O.A.D. (inch)	O.A.W. (inch)		Single	Dual	Single	Dual		Tread	Sidewall	
Specialty															
33x12.50R15LT 108Q C/6	300530	8.5-10.0-11.0	62	17	32.6	12.5	14.0	2205	-	35	-	637	3P+2S+2N	3P	
35x12.50R15LT 113Q C/6	300540	8.5-10.0-11.0	73	17	34.5	12.7	15.1	2535	-	35	-	602	3P+2S+2N	3P	
LT285/75R16 122Q D/8*	302000	7.5-8.0-9.0	53	17	32.8	11.3	14.5	3305	-	65	-	636	2P+2S+2N	2P	
LT295/75R16 123Q D/8*	300340	7.5-8.0-9.5	57	17	33.4	11.6	14.7	3415	-	65	-	624	2P+2S+2N	2P	
LT315/75R16 121Q D/8* (35x12.50R16)	300360	8.0-8.5-10.0	67	17	34.6	12.3	15.1	3195	-	50	-	603	2P+2S+2N	2P	
LT305/70R16 124Q E/10 (33x12.50R16)	300350	8.0-9.0-9.5	58	17	32.7	12.2	14.5	3525	-	65	-	636	2P+2S+2N	2P	
LT365/65R16 125R D/8 (35x14.50R16)	301420	10.0-11.0-11.5	73	17	34.9	14.7	15.4	3640	-	50	-	596	2P+2S+2N	2P	
LT285/75R17 128S E/10 (34x11.50R17)	300690	7.5-8.0-9.5	67	17	33.8	11.7	15.1	3970	-	80	-	614	3P+2S+2N	3P	
LT245/70R17 119S E/10	301160	6.5-7.0-8.0	45	15	30.5	9.7	13.8	3000	-	80	-	681	2P+2S+2N	2P	
LT285/70R17 121S D/8* (33x11.50R17)	301400	7.5-8.5-9.0	53	17	32.7	11.3	14.6	3195	-	65	-	636	2P+2S+2N	2P	
LT285/70R17 126S E/10 (33x11.50R17)	301480	7.5-8.5-9.0	53	17	32.7	11.5	14.6	3750	-	80	-	636	2P+2S+2N	2P	
LT325/70R17 122R D/8 (35x13.0R17)	301350	8.5-9.5-10.0	77	17	34.9	13.0	15.5	3305	-	50	-	596	3P+2S+2N	3P	
LT355/70R17 127R D/8 (37x14.0R17)	301360	9.5-10.5-11.0	85	17	36.5	14.2	16.1	3860	-	50	-	569	3P+2S+2N	3P	
P255/70R18 112T	300850	6.5-7.5-8.5	41	13	32.1	10.3	14.5	2469	-	35	-	647	2P+2S+1N	2P	
LT285/75R18 129S E/10 (35x11.5R18)	300420	7.5-8.0-9.0	66	17	34.8	11.3	15.6	4080	-	80	-	597	2S+3P+2N	3P	
LT275/70R18 125S E/10* (33x11.0R18)	300620	7.0-8.0-8.5	55	16	33.1	11.0	14.9	3640	-	80	-	626	2P+2S+2N	2P	
LT275/65R18 113T C/6* (32x11.0R18)	300600	7.5-8.0-9.0	51	16	31.9	10.9	14.4	2535	-	50	-	651	2S+2P+2N	2P	
LT275/65R18 123S E/10* (32x11.0R18)	300680	7.5-8.0-9.0	52	16	32.0	11.0	14.5	3415	-	80	-	649			
LT285/65R18 125S E/10* (33x11.5R18)	300630	8.0-8.5-10.0	57	17	32.5	11.4	14.6	3640	-	80	-	640	2P+2S+2N	2P	
LT325/60R18 119S D/8 (33x13.0R18)	301310	9.5-10.5	60	16	33.0	12.6	14.9	2998	-	50	-	629	2P+2S+2N	2P	
LT325/65R18 121R D/8 (35x13.0R18)	301430	9.0-9.5-10.0	75	17	34.9	13.3	15.6	3195	-	50	-	596	3P+2S+2N	3P	
LT355/65R18 125R D/8 (37x14.0R18)	301440	10.0-10.5-11.0	86	17	36.6	14.1	16.3	3640	-	50	-	566	3P+2S+2N	3P	
LT275/65R20 126S E/10	301140	7.5-8.0-9.5	57	16	34.0	11.0	15.5	3750	-	80	-	611	2P+2S+2N	2P	
LT305/60R20 123S E/10 (34x12.50R20)	300610	8.5-9.0-11.0	65	16	34.3	12.6	15.6	3415	-	65	-	605	2S+2P+2N	2P	
LT325/60R20 121R D/8 (35x13.0R20)	301410	9.5-10.5	74	16	35.2	12.9	15.9	3195	-	50	-	591	2P+2S+2N	2P	
LT355/60R20 125R D/8 (37x14.0R20)	301370	10.0-10.5-11.5	88	17	36.8	14.2	16.5	3640	-	50	-	565	3P+2S+2N	3P	
LT285/55R20 122S E/10	301150	8.0-9.0-10.0	52	15	32.3	11.7	14.8	3305	-	80	-	643	2P+2S+2N	2P	
LT305/55R20 121S E/10 (33x12.0R20)	301340	9.0-9.5-10.0	57	16	33.2	12.4	15.2	3195	-	65	-	625	2P+2S+2N	2P	
305/45R22 118S	300830	9.5-10.0-11.5	45	13	32.6	11.9	15.1	2910	-	50	-	636	2P+2S+2N	2P	
LT325/50R22 122R E/10 (35x13.0R22)	301380	9.0-10.0-12.0	72	17	34.8	13.0	16.0	3305	-	65	-	596	2P+2S+2N	2P	
LT325/50R24 124R E/10 (37x13.0R24)	301450	9.0-10.0-12.0	75	17	36.7	12.8	17.0	3525	-	65	-	566	2P+2S+2N	2P	

* Indicates white letter styling. RD = Reinforced. Bold designates measuring rim width. All Toyo brand tires are subject to continuous development. Toyo Tire U.S.A. Corp. reserves the right to change construction, materials or specifications without notice or obligation. Contact your Toyo dealer or Toyo Tires for current information.

Construction Elements

Tread: 3P = 3-Ply Polyester Casing, 2P = 2-Ply Polyester Casing, 2S = 2 Steel Belts, 2N = 2 Nylon Cap Plies, 1N = 1 Nylon Cap Ply

Sidewall: 3P = 3 Ply Polyester

See Toyo Safety Advisory for Lifted Light Trucks, Page 48